

PST-1600HT

Pneumatic heat assisted laminator



ADVANTAGES:

- Low temperature increases the stickiness of Cold Lamination.
- Anti-stickiness silicone roller.
- High efficiency lamination, good effect without wrinkles and bubbles.
- Automatic collector of paper backing.
- Support rolls with diameter up to 165 mm.


- The perfect complement for your production line.
- Save time protecting your printings with the automatic low temperature laminator.
- Suitable to use "liner less" lamination.

APPLICATIONS:

- Lamination and mounting images on panels.



Cutting unit

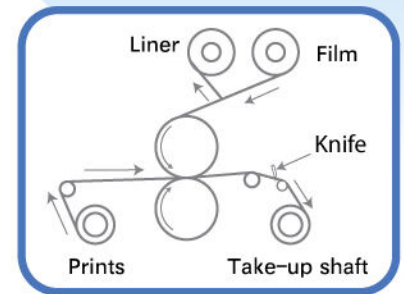

Laminating with Cutting Unit

Model	PST-1600HT
Max. film width	1620 mm - 63.7"
Max. thickness	35 mm - 1 3/8 "
Max speed	0 m/min - 32 ft/min
Max temp	60C - 128F
Preheating time	10 - 15 min
Roller up/down	Air Cylinder
Voltage	AC 220v - 5 Amp.
Net weight	210 KG - 460 Lbs.
Dimensions	2100 x 700 x 1300 mm
	7 x 2.3 x 4.25 ft
Safety sensor	Yes, infrared
Warranty	1 year

📍 2420 W 80 St. Unit 1
Hialeah FL 33016

☎ 954-272-8534

☎ +19549402776 / +19542785930


📧 pawsignstech

✉ sales@pst-global.net

www.pst-global.net

PST-Flatbed Applicator

Pneumatic heat assisted Flatbed Applicator

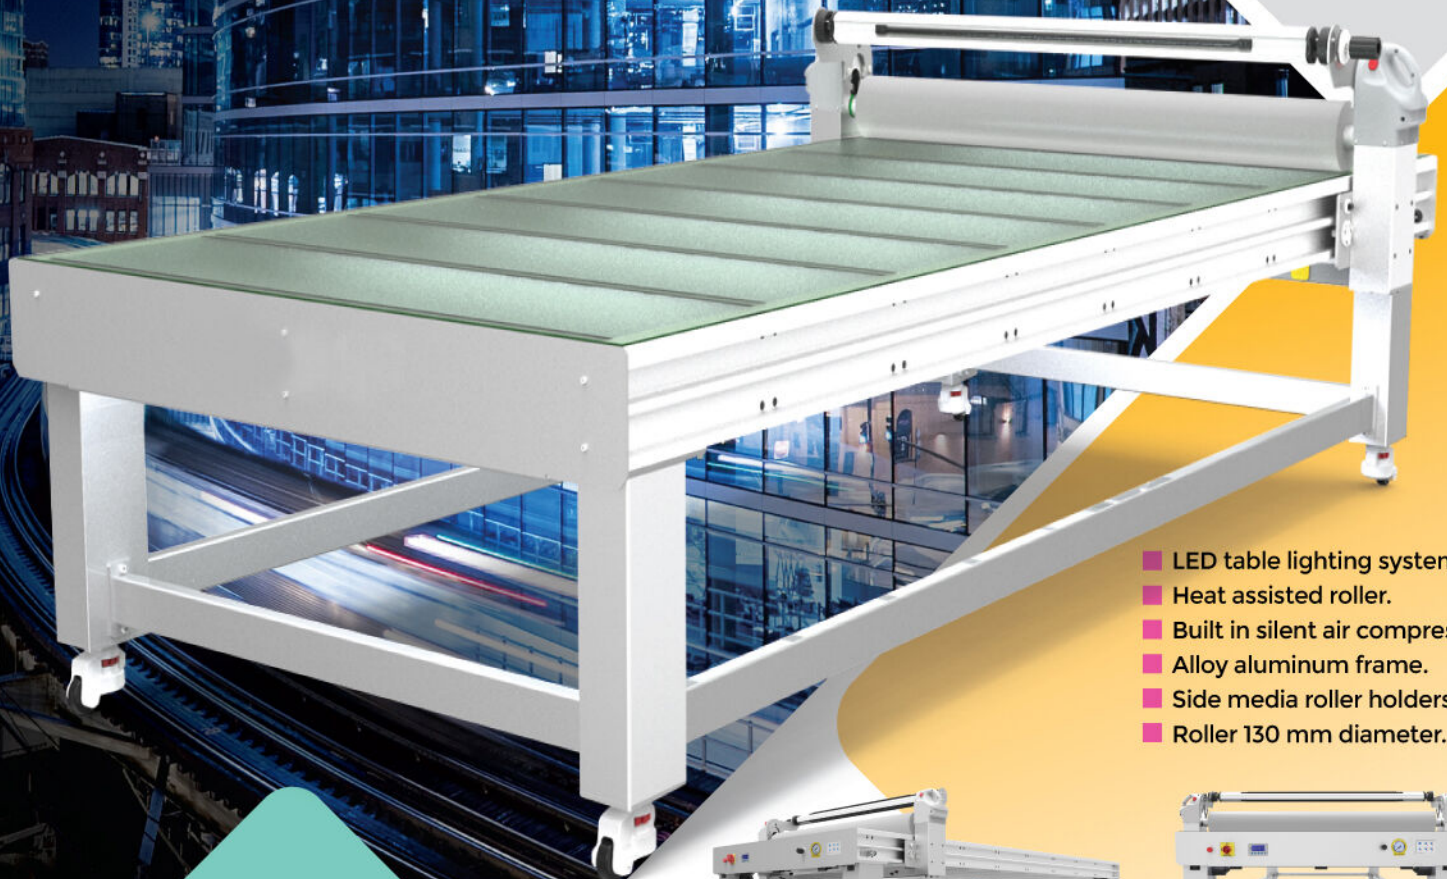


- LED table lighting system.
- Heat assisted roller.
- Built in silent air compressor.
- Alloy aluminum frame.
- Side media roller holders.
- Roller 130 mm diameter.

APPLICATIONS:

- Mounting, Laminating, Pre-masking, Work table.
- Apply for furniture and advertising industry.

NOTE:
Flexible adjusting table height, convenient for different operators.

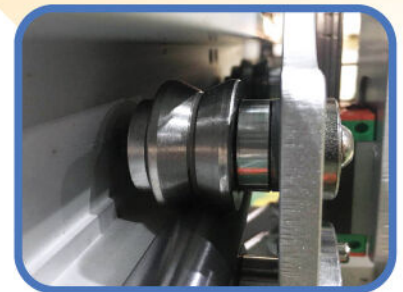

Model	FB-1530i
Max lamination size	1500 x 3000 mm / 59" x 118"
Max. thickness	50 mm / 1.96 "
Operation type	Manual
Max temp	60C - 128F
Preheating time	10 - 15 min
Roller up/down	Pneumatic Air Cylinder
Voltage	AC 220v - 5 Amp.
Pressure range	0 - 120 psi
Net weight	880 KG - 1900 Lbs.
Warranty	1 year

📍 2420 W 80 St. Unit 1
Hialeah FL 33016

☎ 954-272-8534

📞 +19549402776 / +19542785930

🌐 pawsignstech

✉ sales@pst-global.net

www.pst-global.net